




PX SERIES PERFORMANCE DATA

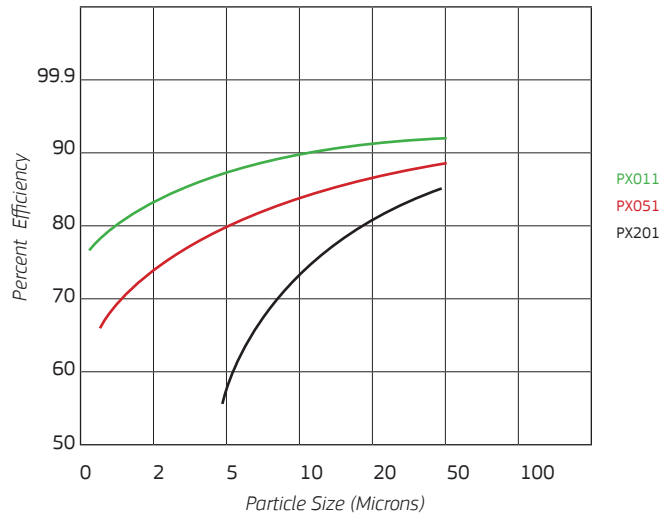

GENERAL INFO

SEDIMENT REMOVAL FILTER CARTRIDGE

Polyspun Sediment Cartridges

The PX Series are compatible with most liquids and are highly effective for sediment, rust, sand, silt, algae removal. PX cartridges have no chemical residues.

The economical Puretec PX Series cartridges are constructed from virgin polypropylene which is spun and melted simultaneously. This innovative technique means there is no centre core to restrict filter performance. Precise depth filtration is achieved through graded density construction.

MATERIALS OF CONSTRUCTION

- Filter Media Polypropylene
- Temperature Rating 4.4°C to 60°C

FEATURES & BENEFITS

- 3 times longer life than comparable cartridges
- Graded depth filtration
- Protects appliances and health with sediment free water
- Flows up to 180 litres/minute
- 2 diameter options – Standard, MaxiPlus™
- Temperature rating up to 60°C.

CARTRIDGES SPECIFICATIONS AND PERFORMANCE DATA

	Ordering Code	Micron Rating	Size	Flow (Lpm)
5"	PX055	1	standard 2.5" x 5"	14
	PX011	1	standard 2.5" x 10"	27
10"	PX051	5	standard 2.5" x 10"	28
	PX101	10	standard 2.5" x 10"	32
	PX201	20	standard 2.5" x 10"	34
	PX501	50	standard 2.5" x 10"	38
	PX011-2	1	standard 2.5" x 10"	27
	PX051-2	5	standard 2.5" x 10"	28
	PX101-2	10	standard 2.5" x 10"	32
	PX201-2	20	standard 2.5" x 10"	34
	PX501-2	50	standard 2.5" x 10"	38
	20"	PX012	1	standard 2.5" x 20"
PX052		5	standard 2.5" x 20"	56
PX102		10	standard 2.5" x 20"	64
PX202		20	standard 2.5" x 20"	67
PX502		50	standard 2.5" x 20"	72
10" MP	PX01MP1	1	MaxiPlus 4.5" x 10"	75
	PX05MP1	5	MaxiPlus 4.5" x 10"	76
	PX20MP1	20	MaxiPlus 4.5" x 10"	84
	PX50MP1	50	MaxiPlus 4.5" x 10"	90
20" MP	PX01MP2	1	MaxiPlus 4.5" x 20"	152
	PX05MP2	5	MaxiPlus 4.5" x 20"	156
	PX20MP2	20	MaxiPlus 4.5" x 20"	164
	PX50MP2	50	MaxiPlus 4.5" x 20"	180